


# IMOLA MULLION GUIDE


## Perspective



Head and Base (1:3)

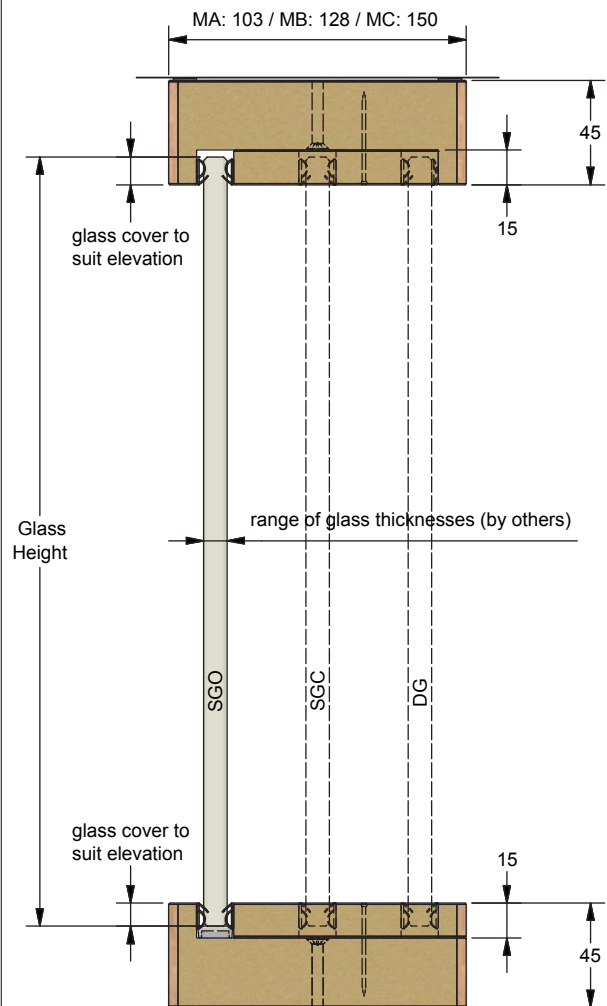


### Abutment and Joint (1:3)

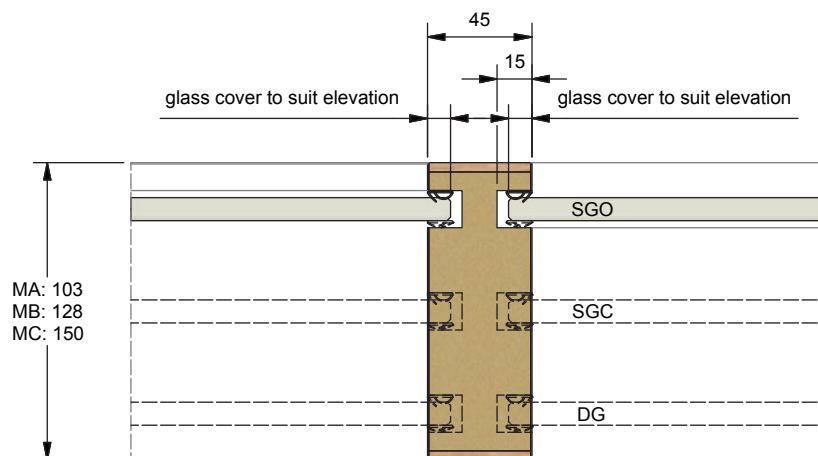

# MULLION GUIDE


## MULLION - SINGLE GLAZED OFFSET

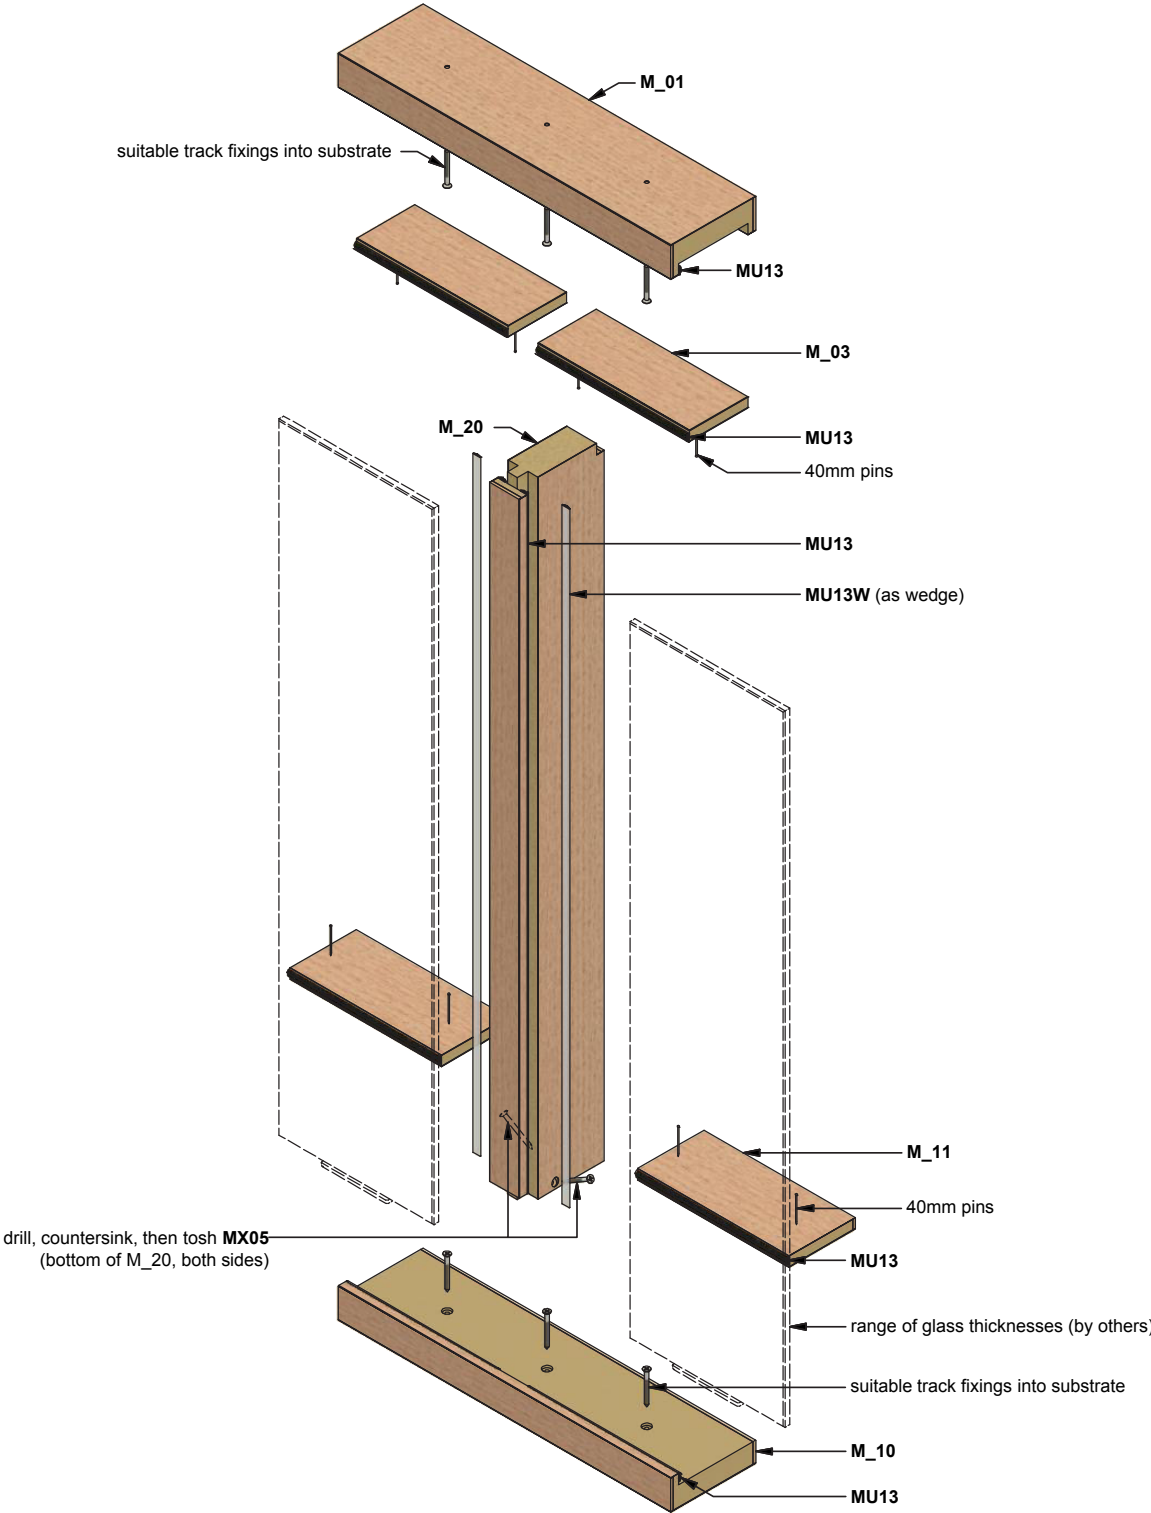

MA\_ - 75mm solid  
 MB\_ - 100mm solid  
 MC\_ - 122mm solid  
 MU\_ - Universal

# MULLION GUIDE


## MULLION - SINGLE GLAZED CENTRAL

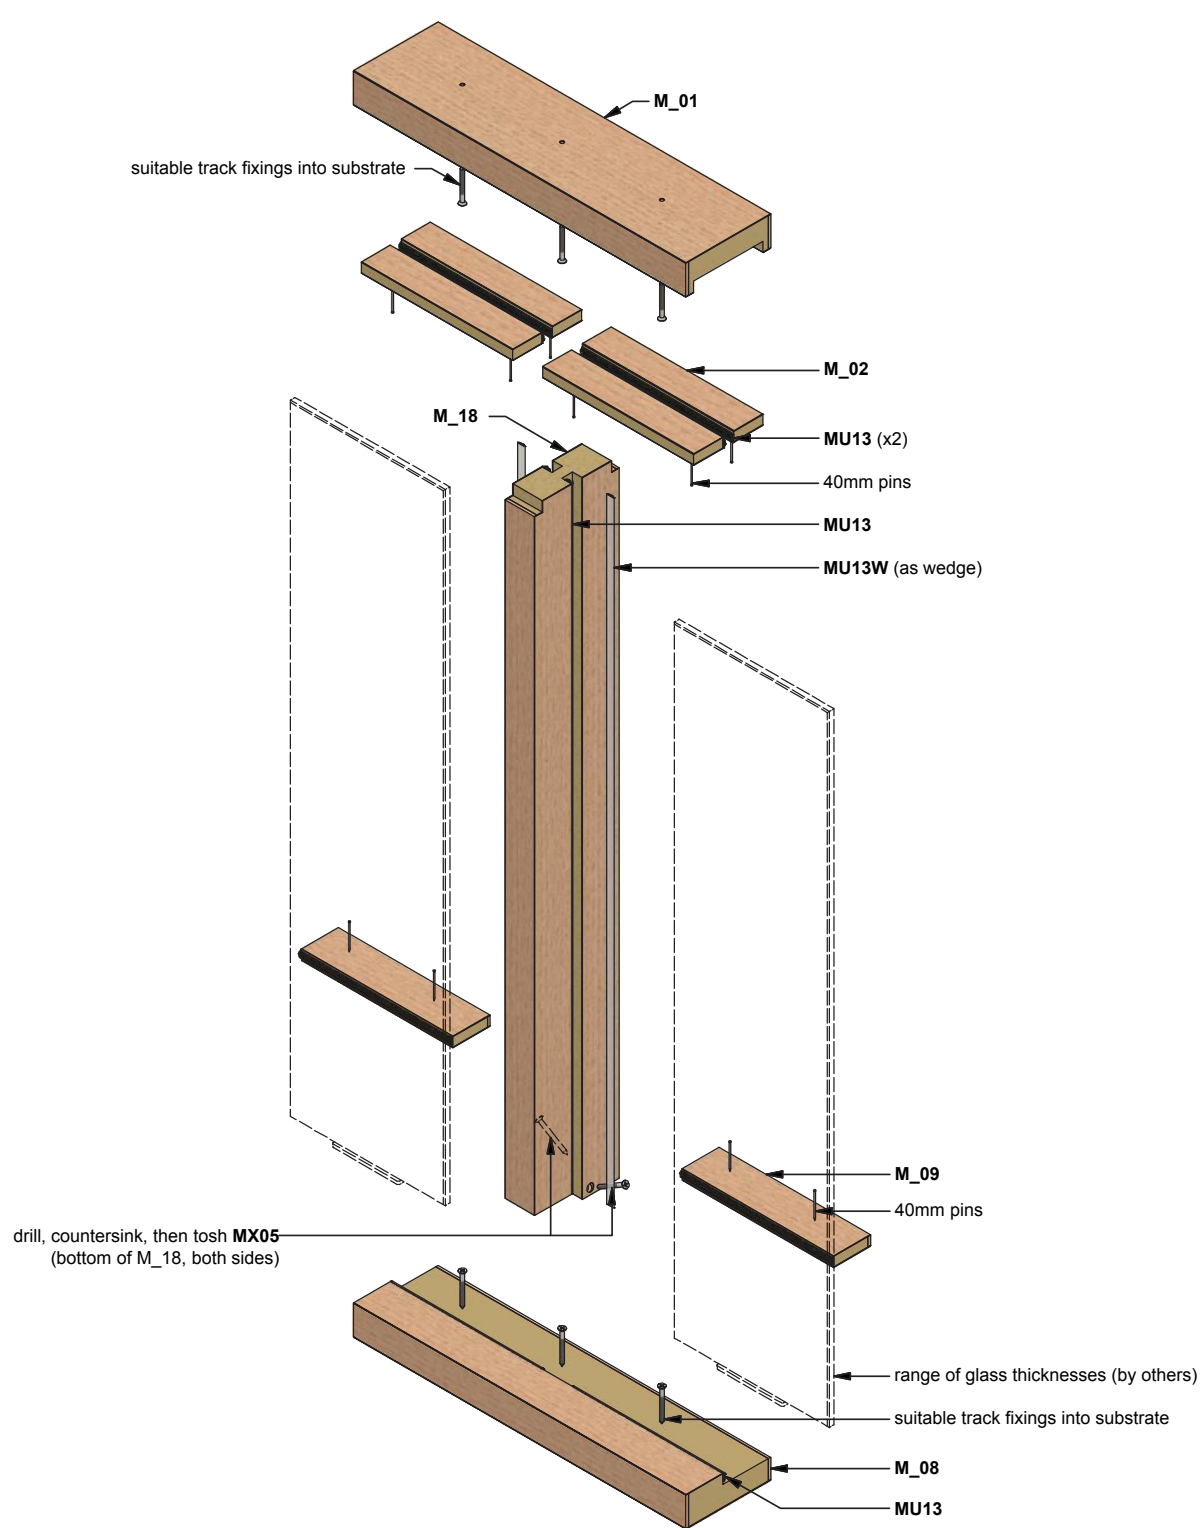

MA\_ - 75mm solid  
 MB\_ - 100mm solid  
 MC\_ - 122mm solid  
 MU\_ - Universal

# MULLION GUIDE

## MULLION - DOUBLE GLAZED

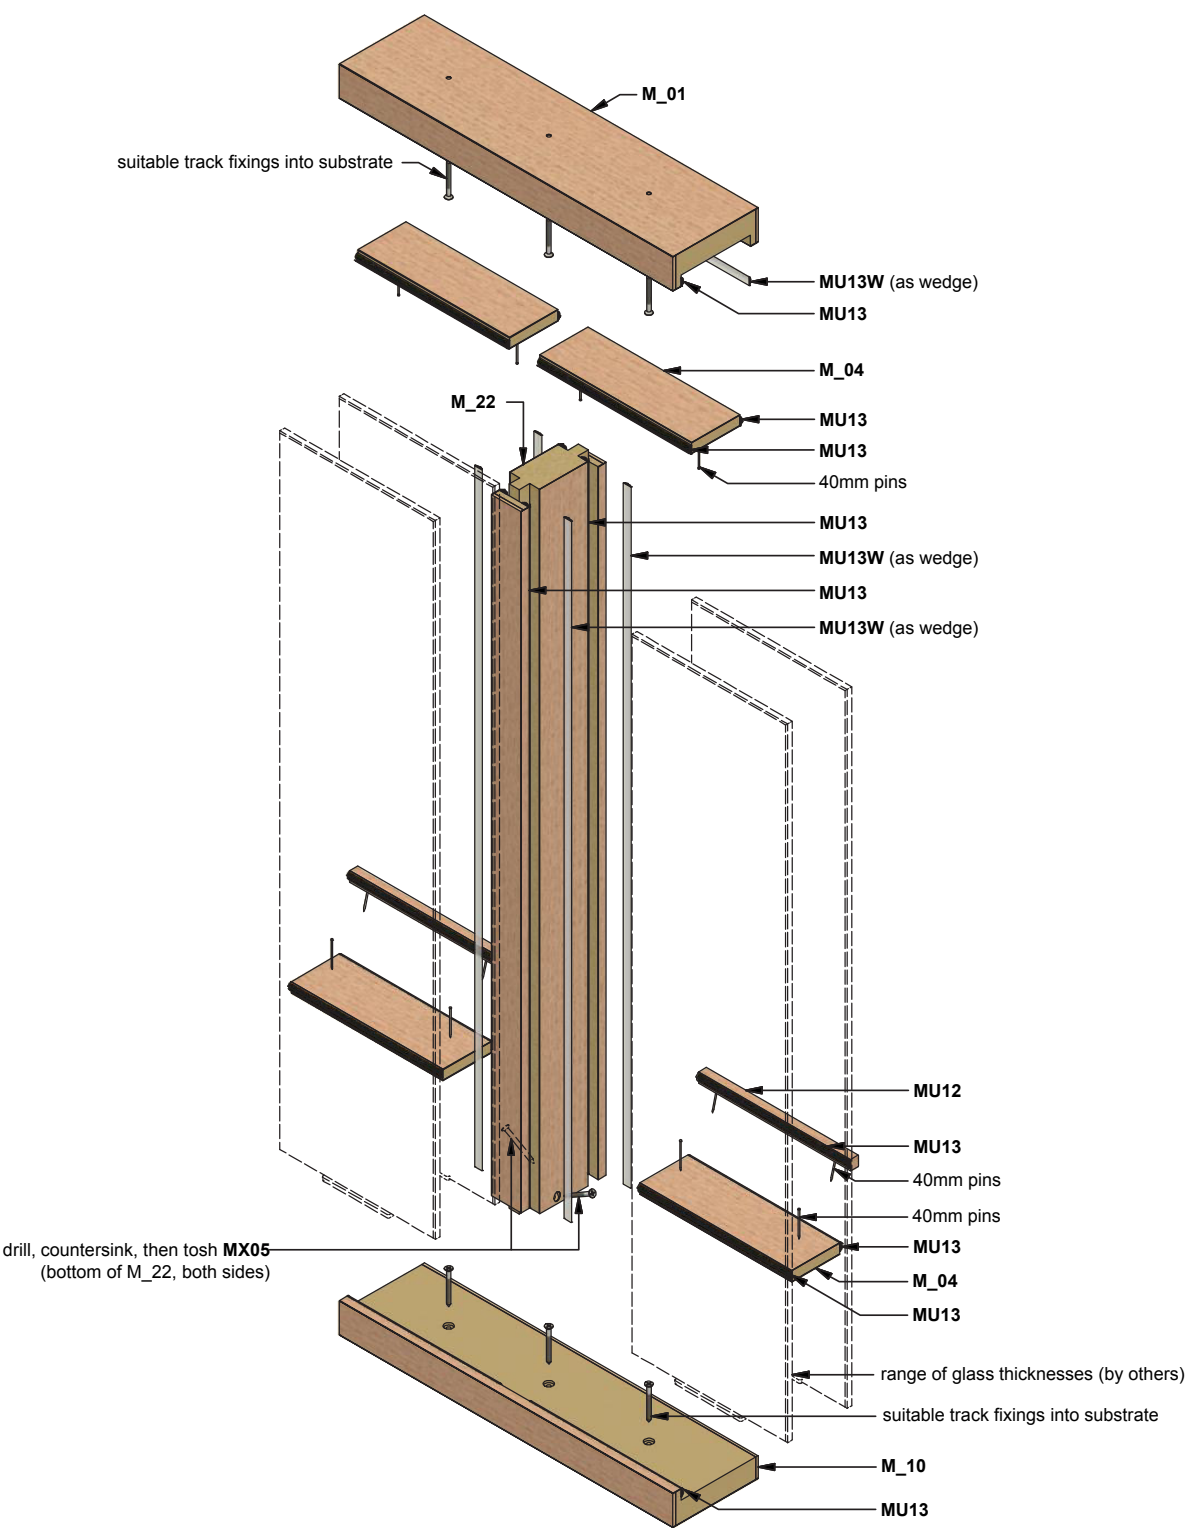


MA\_ - 75mm solid  
 MB\_ - 100mm solid  
 MC\_ - 122mm solid  
 MU\_ - Universal


# MULLION GUIDE

## MULLION - POST NOTCH

Post Notch Isometric


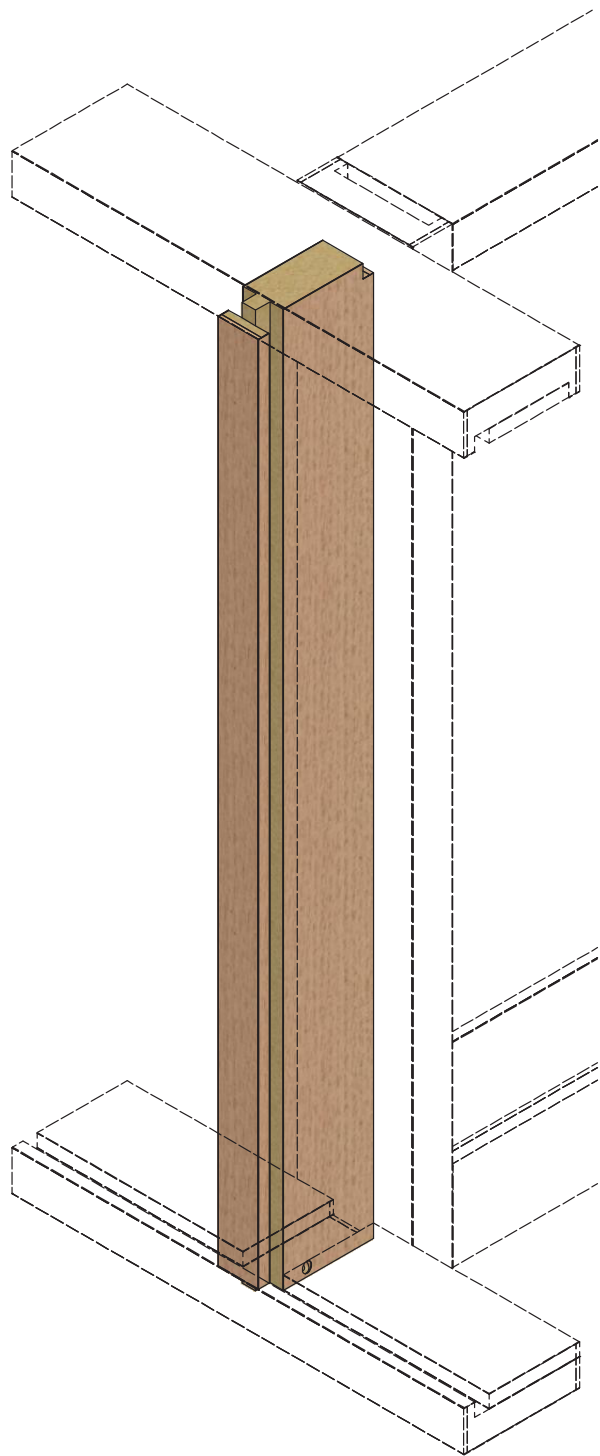


Bottom Post Notch

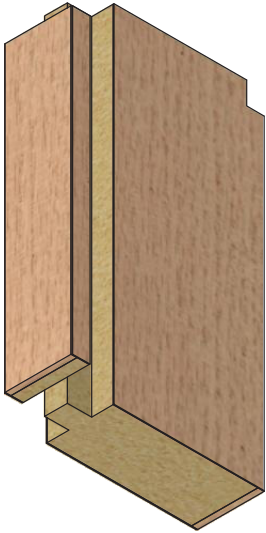

top notch is  
pre-machined


dimension  
between  
head and  
base track

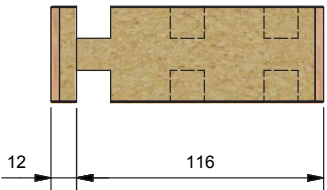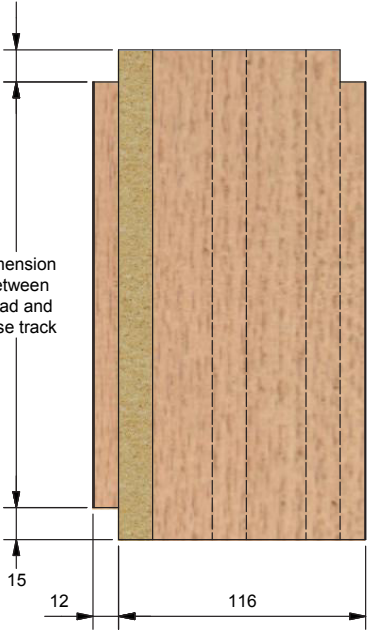


# MULLION GUIDE

## BLINDS MULLION - DOUBLE GLAZED


Perspective

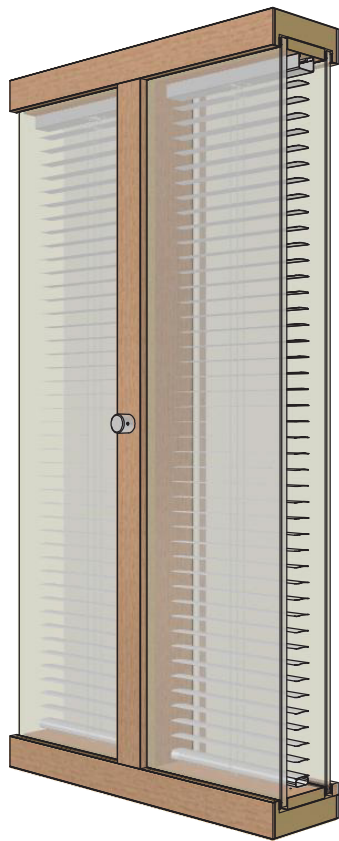

Head and Base (1:3)

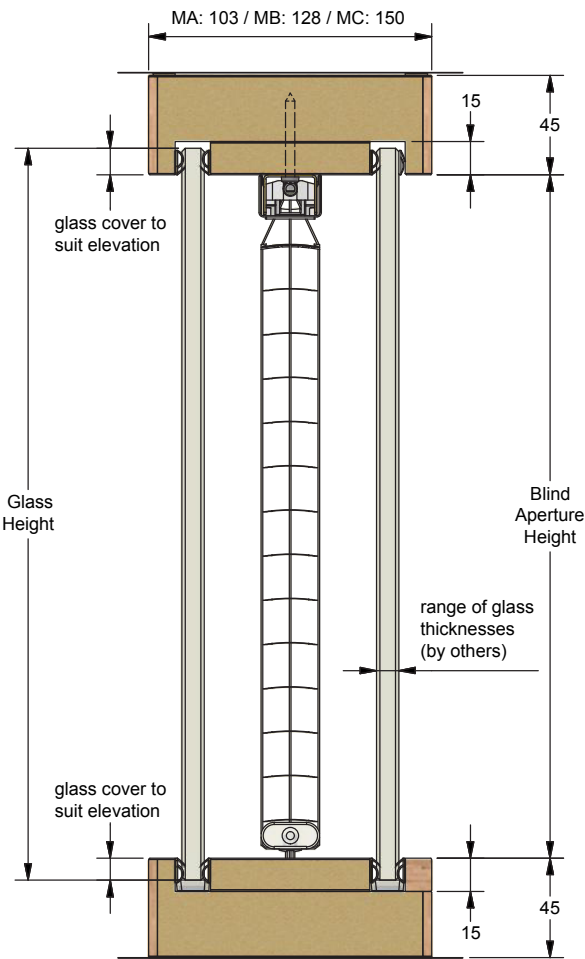

Corner (1:3)

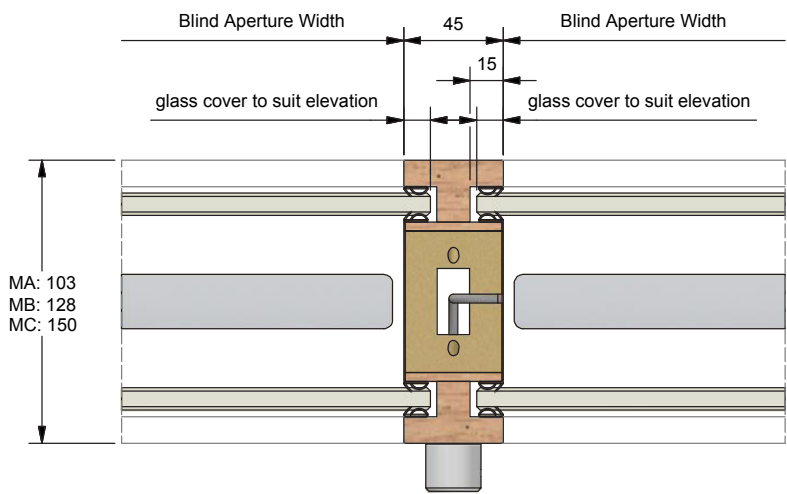


## BLINDS MULLION - DOUBLE OFFSET




## BLINDS MULLION - DOUBLE OFFSET

Blind Control Isometric

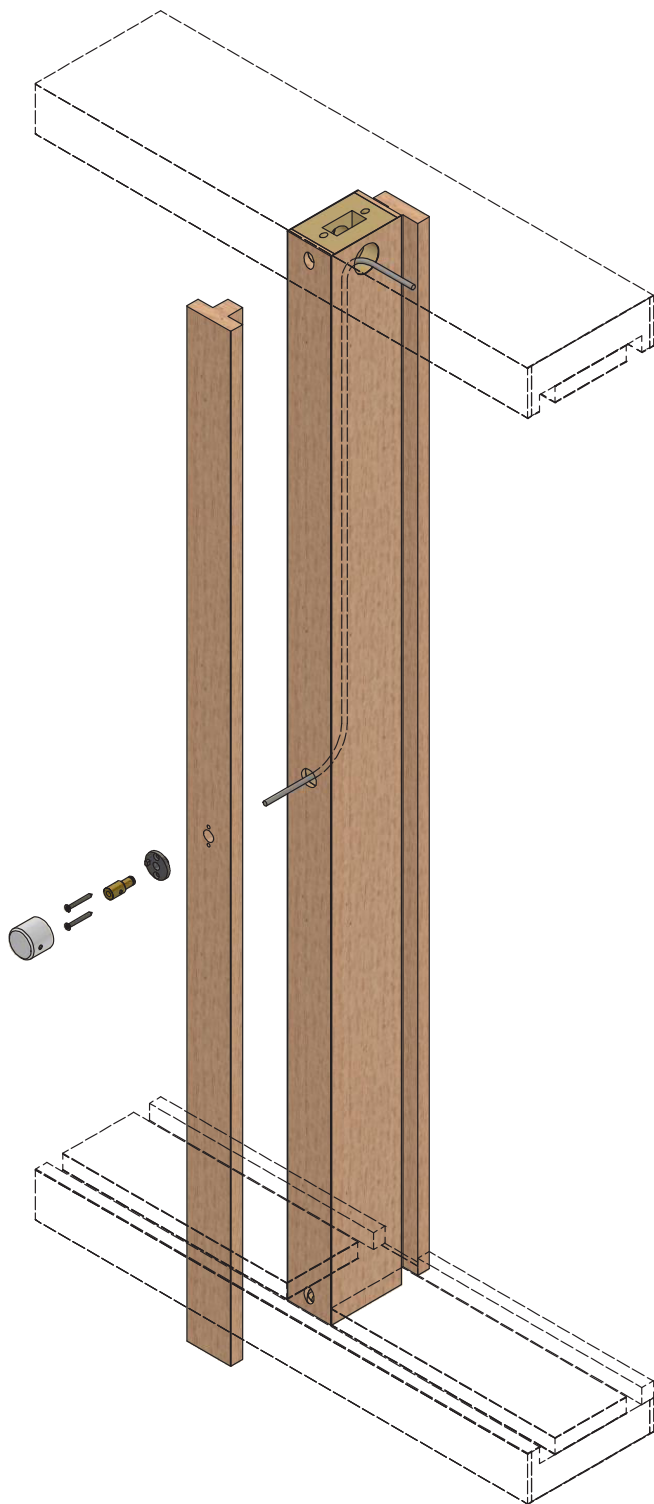

Blind Control Holes (site drilled)

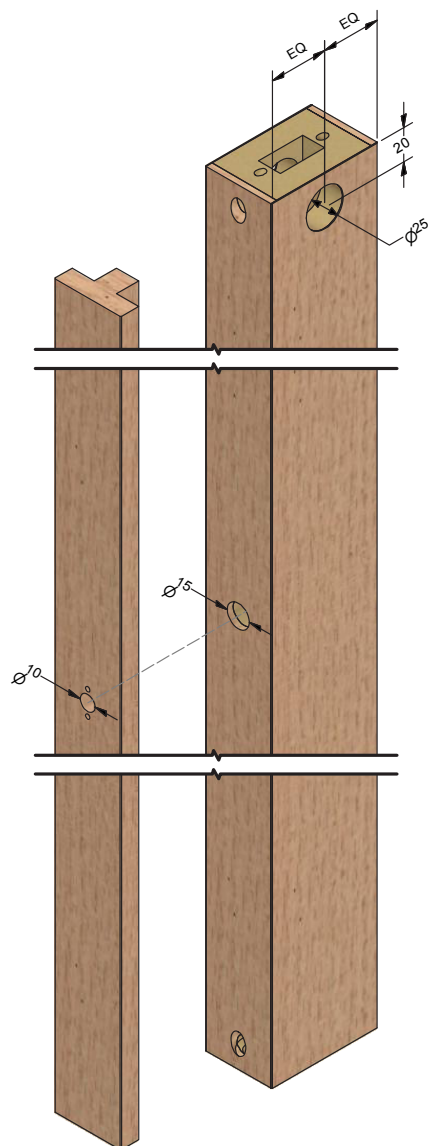

Top hole (Ø25mm) dimension is based upon the post being cut to inside track cavity dimensions (i.e. 30mm from ceiling height).

The top hole (Ø25mm) can be angled down, and the control hole (Ø15mm) can be angled up, to allow the bends of the bowden cable to be less sharp.

Blind control holes in trim and post to be positioned at height set by the Client.

The post can be drilled twice to accomodate holes for twin blind control knob sets.

Note, hole dimensions may vary for different blind manufactures, so check their recommended hole dimensions before drilled the trim and post.